


# Bullet Resistant Doors Levels 1-8

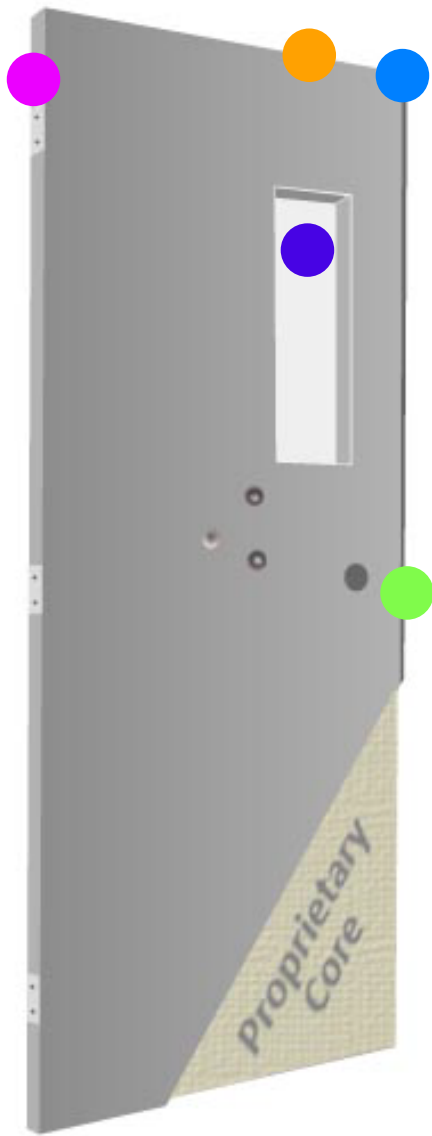

## Features

- Tested in accordance with UL 752 level 1 through 8 for ballistic products
- 1 3/4" standard
- ● Any manufacturer's hinge locations
- 18-gauge A60 galvanized steel standard
- Minimum 16-gauge steel faces
- ● Continuously welded vertical edges (seamless) standard
- Rust inhibitive prime coat ANSI/SDI 250.10-1998
- Bullet resistant frames available

## Material Options

- 16-gauge steels
- G90 galvanized steel
- Stainless steel, available in 304 or 316 alloys

## Feature Options










- ● Integral lite option(1)
- ● Flush top cap (1)
- ● Any manufacturer's Dealock prep (1), Panic prep (1), and Mortise sectional trim (1)

## Hardware Reinforcements

- 3/16" for hinges
- 12-gauge for locks standard
- 14-gauge for closers standard
- Heavier gauge reinforcements available

(1) *Optional feature for an additional charge*

THREAT LEVELS

LEVEL	BULLET	CALIBER	SHOTS
1		9mm (124g) FMJ	3
2		.357 Magnum (158g) SP	3
3		.44 Magnum (244g) SP	3
4		.30 Caliber Rifle (180g) SP	1
5		7.62mm Rifle (150g) FMJ	1
6		9mm Multi (124g) FMJ	5
7		5.56mm Rifle (55g)	5
8		7.62 Multi Rifle (150g) FMJ	5
8 (AP)		30-06 Rifle (166g) AP	5