


# Custom Honeycomb Core Doors

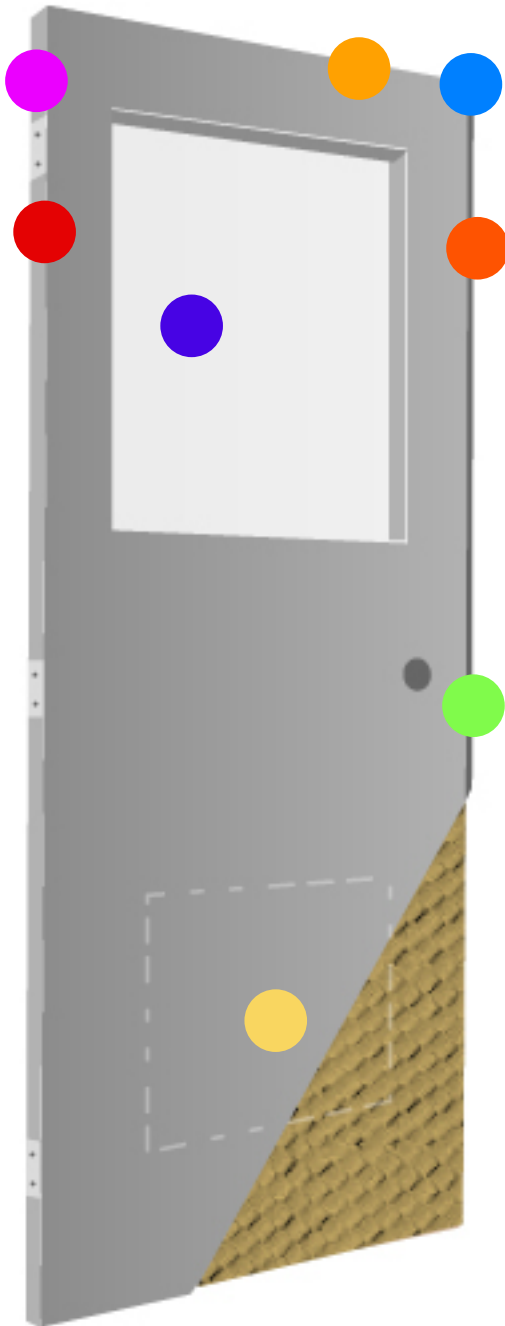

## Features

- 1 ¾" standard; also available in 1 3/8"
- ● Any manufacturer's hinge locations
- 18-gauge A60 galvanized steel standard
- ● Continuously welded vertical edges (seamless) standard
- Rust inhibitive prime coat ANSI/SDI 250.10-1998
- Also available as a stock door

## Material Options

- 16-gauge, 14-gauge and 12-gauge steel
- G90 galvanized steel
- Stainless steel
- Resin impregnated honeycomb

## Feature Options

- ● Up to 3 hour fire label
- ● Integral lite option (1)
- ● Integral louver option (1)
- ● Flush top cap (1)
- ● Any manufacturer's Dealock prep (1,2), Panic prep (1), and Mortise sectional trim (1,2)
- ● Flat bar astragal (pairs) (1)

## Hardware Reinforcements

- 3/16" for hinges
- 12-gauge for locks standard
- 14-gauge for closers standard
- Heavier gauge reinforcements available

(1) Optional feature for an additional charge

(2) Some trim options are not available in the stock program