

Sound Transmission Control (STC) Doors

Features

- **NEW!** Up to and including STC 48 for pairs of doors; includes factory-supplied astragal
- All STC ratings available for single doors up to and including STC 54
- 1 ¾" doors (light weight for STC doors)
- ● Any manufacturer's hinge locations
- ● Continuously welded vertical edges (seamless) standard
- Uses 4 ½ ' 180 heavyweight hinge (not supplied)
- No cam lift hinge required
- All required seals and a threshold are included
- Galvannealed steel standard
- Single door vision lites available up to and including STC 48
- Rust inhibitive prime coat ANSI/SDI A250.10-1998
- Tested in accordance with ASTM E90-09
- Frame must be solid grouted by others
- STC frames available

Material Options

- Stainless steel, available in 304 or 316 alloys


Feature Options

- ● Up to 3 hour fire label
- ● Integral lite option (1)
- ● Flush top cap (1)
- ● Any manufacturer's Dealock prep (1), Panic prep (1), and Mortise sectional trim (1)
- ● Astragal (for pairs) (1)

Hardware Reinforcements

- 3/16" for hinges
- 12-gauge for locks standard
- 14-gauge for closers standard
- Heavier gauge reinforcements available

(1) *Optional feature for an additional charge*

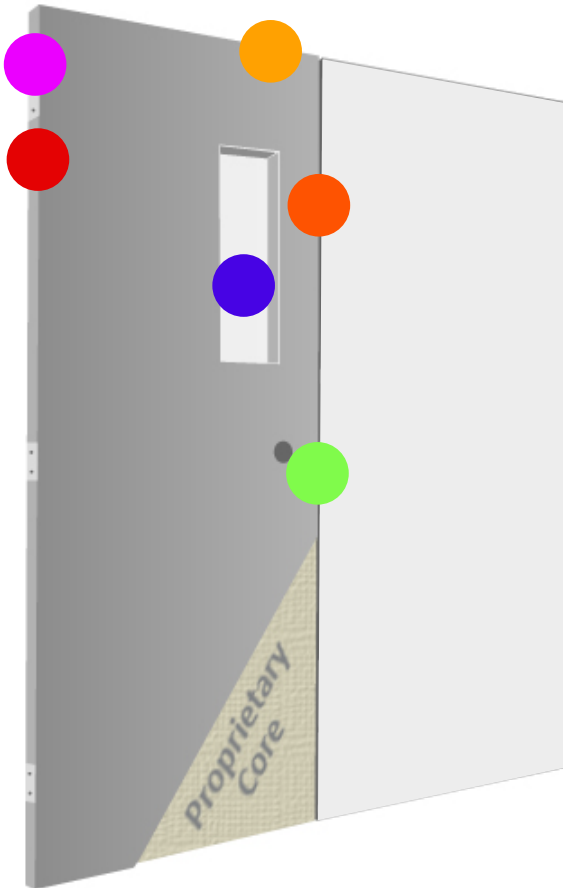

Sound Transmission Class Capabilities of Door Components

Door Components STC product range	Description
STC 50 - STC 54	Very loud sounds are faintly heard
STC 40 - STC 49	Loud speech is barely audible
STC 35 - STC 39	Loud speech is audible but words hard to distinguish
STC 30 - STC 34	Loud speech can be distinguished; normal speech barely heard or inaudible