


Custom KD Drywall Frames

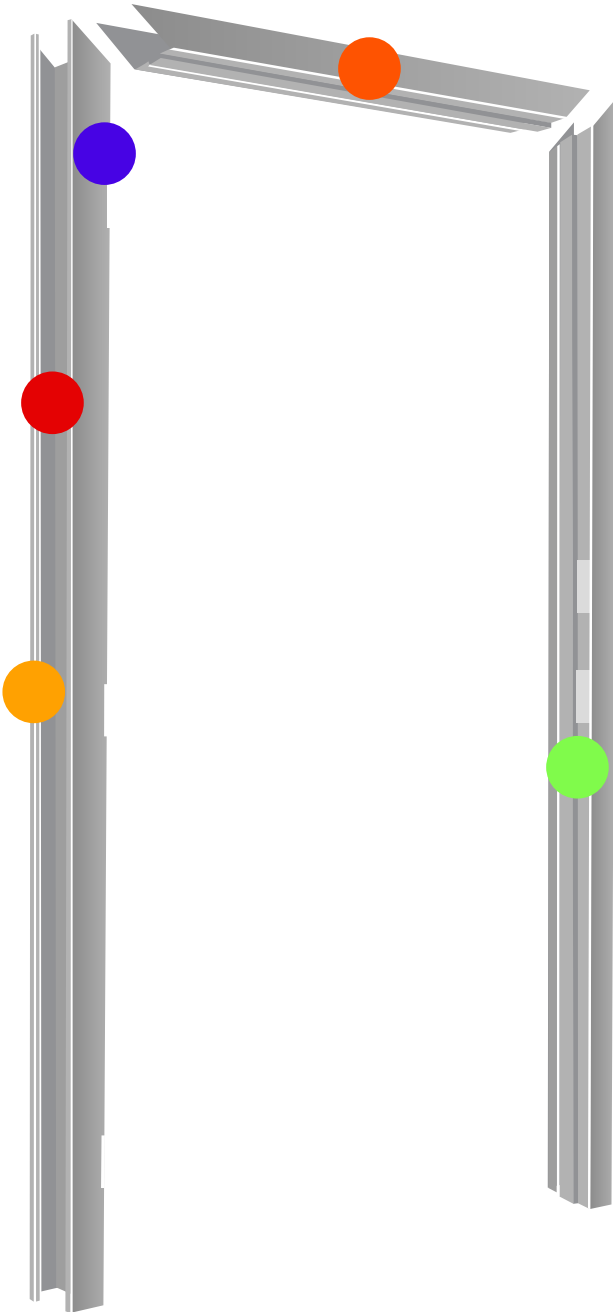

Features

- 16-gauge A60 galvanized steel standard
- 7-gauge hinge reinforcements standard
- 12-gauge for closers standard
- Rust-inhibitive prime coat ANSI/SDI 250.10-1998
- ● Any manufacturer's hinge locations
- ● Any manufacturer's strike prep location
- ● KD Drywall Anchor
- Any width and height
- Any jamb depth

Material Options

- 14-gauge and 12-gauge steel
- Available in Stainless Steel

Feature Options

- Continuous weld
- ● Up to 90 minute fire label
- Hospital stop

Hardware Reinforcements

- ● Optional prep to accept all manufacturers' hardware requirements